

## Foam cord

### PRODUCT

It is a round profile polyethylene, expanded flexible closed cell. It can be used as the support body and depth adjuster for applying sealant masses in general (mastic, silicone ...) as expansion joints and seals.

### APPLICATIONS

- Limiting joints for concrete floors;
- Fixing glass in window frames;
- Fixing glass partitions.

### PLACEMENT



The application is given by the simple introduction of limiting the desired space, which can be manual or through a blunt object (not to harm the surface).

The limiter should have enough compression to keep it immobilized. For a proper compression, its diameter should be 25% larger than the space to be filled.

**Note: Sealants whose temperature exceeds 70C (158F) cannot be applied on the limiter.**



### APPLICATION EXAMPLE

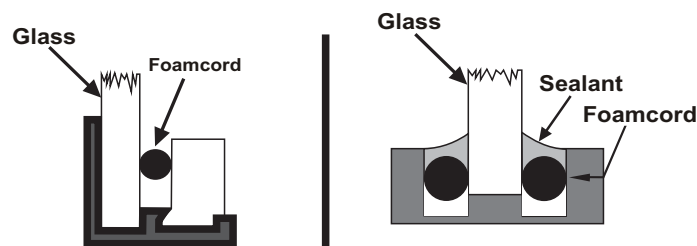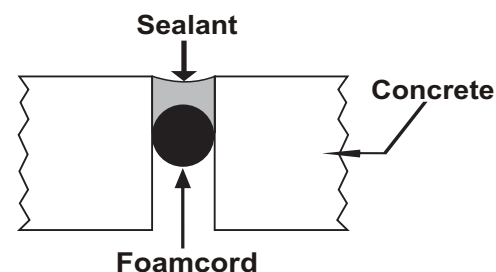

### PACKAGING

MEASUREMENTS	BOX
6 mm	2.500 metrs
8 mm	1.500 metrs
10 mm	1.150 metrs
13 mm	750 metrs
15 mm	550 metrs
20 mm	350 metrs
30 mm	160 metrs

### HEALTH AND SAFETY

The product does not require any type of PPE (personal protective equipment) for handling or transportation.

### STORAGE

Should be stored in a covered and dry place.

**VALIDITY:** Indeterminate time.